




## Klaran® GD Series UVC LEDs



### PURE DISINFECTION

Klaran GD Series UVC LEDs provide effective chemical, odor and mercury free disinfection.




### COMPACT SIZE

Klaran GD Series UVC LEDs easily integrate into a wide range of disinfection applications—from single LED designs up to multiple LED arrays for wide area disinfection.



### REDUCED LIFETIME COSTS

With highly reliable optical output from Klaran GD Series UVC LEDs, manufacturers can extend the service life of disinfection products and reduce maintenance cost.



## Product Nomenclature

Klaran LEDs are binned by peak wavelength and total power output ( $P_o$ ).

Part Number	Peak Wavelength	Total Optical Power Output at 350 mA	
		Min	Max
<b>265 Series</b>			
KL265-35P-SM-GD	260 nm - 270 nm	15 mW	20 mW
KL265-35Q-SM-GD	260 nm - 270 nm	20 mW	25 mW
KL265-35R-SM-GD	260 nm - 270 nm	25 mW	30 mW
<b>275 Series</b>			
KL275-35P-SM-GD	270 nm - 280 nm	15 mW	20 mW
KL275-35Q-SM-GD	270 nm - 280 nm	20 mW	25 mW
KL275-35R-SM-GD	270 nm - 280 nm	25 mW	30 mW

## LED Characteristics

Characteristic	Unit	Typical	Max
Viewing angle <sup>1</sup>	degrees	120	
Forward voltage at 350 mA at $T_s$ 35 °C <sup>2</sup>	V	8.45	10
Thermal resistance, junction-to-case at $T_s$ 35 °C	°C/W	10	
Power dissipation at 350 mA at $T_s$ 35 °C	W	2.96	3.50
Recommended Forward Current	mA	350	400

### NOTES:

- Viewing angle is twice of half-value angle. A half-value angle is the angle between axial direction and direction in which the light intensity value is half of the axial intensity.
- $T_s$  is defined as the temperature at the solder point. See Crystal IS AN010 for more information

## Absolute Maximum Ratings


Characteristic	Unit	Min	Max
Forward current	mA	*	400
Reverse voltage	V		-5
Operating case temperature range	°C	-10	55
Storage temperature	°C	-40	100
Junction temperature	°C		115

\* Note: Crystal IS recommends operating LEDs at a current greater than 10% of the noted operating maximum current to stabilize the LED characteristics.

## Typical Radiation Pattern

Klaran LEDs have a nominal viewing angle of 120°.

### TYPICAL RADIATION PATTERN

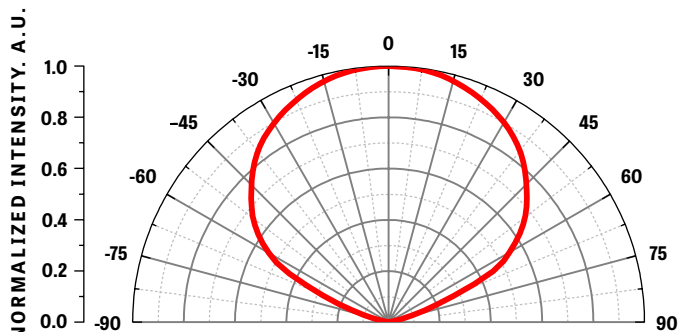


Test Conditions: I (CW) = 50 mA.  
CW = Continuous Wave Mode

## Typical Electrical Characteristics

The typical forward voltage is less than 10 V at an operating current of 350 mA.

### ELECTRICAL CHARACTERISTICS

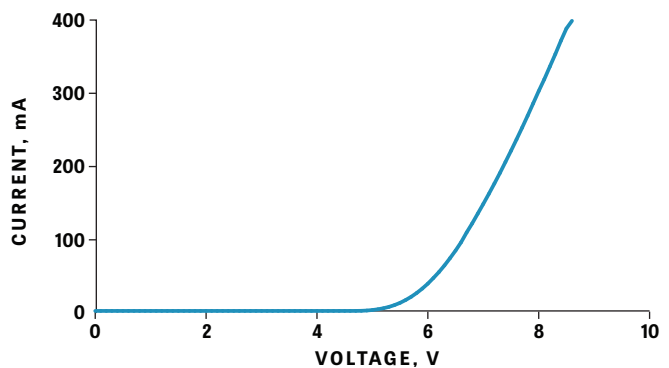


Test Conditions: Solder temperature ( $T_s$ ) = 35 °C  
Pulse mode operation from 1 mA to 350 mA

### Typical Spectral Characteristics Over Current

The plot below shows the typical spectral emission curve for Klaran LEDs.

**SPECTRUM OVER CURRENT**

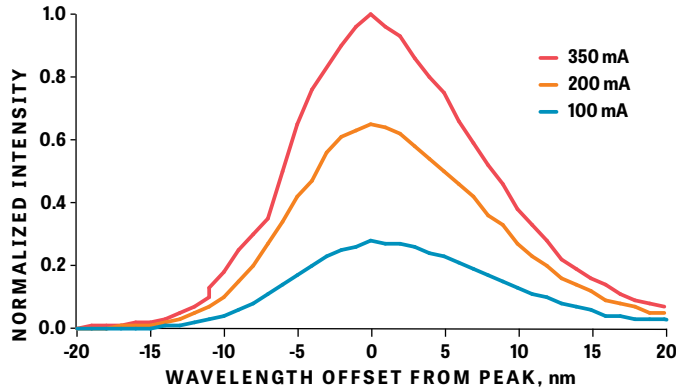


Test Conditions: Solder temperature ( $T_s$ ) = 35 °C  
Pulse mode operation

### Typical Light Output Characteristics Over Current


The plot below shows the typical variation in light output with forward current.

**LIGHT OUTPUT OVER CURRENT**

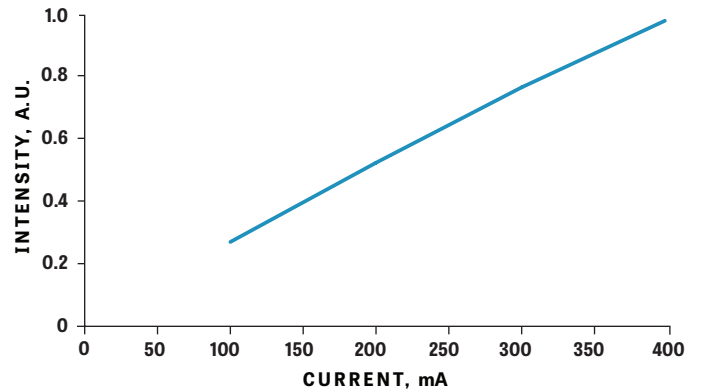


Test Conditions: Solder temperature ( $T_s$ ) = 35 °C  
Pulse mode operation

### Mechanical Dimensions

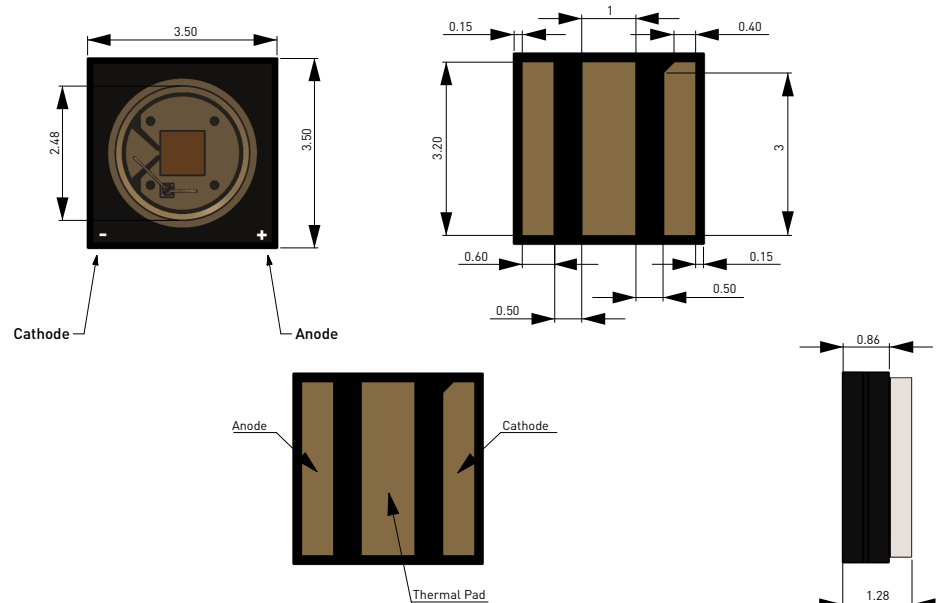

### SOLDER PATTERN

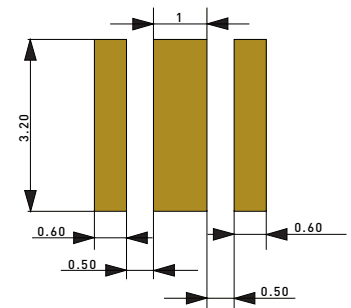


All dimensions are in millimeters. Unless noted otherwise, all dimensions have a tolerance of  $\pm 0.05$  mm.

## Recommended Soldering Guidelines

The recommended solder reflow profile for Klaran UVC LEDs follows the JEDEC standard J-STD-020D. Hand soldering is not recommended for these devices.

FIGURE 1

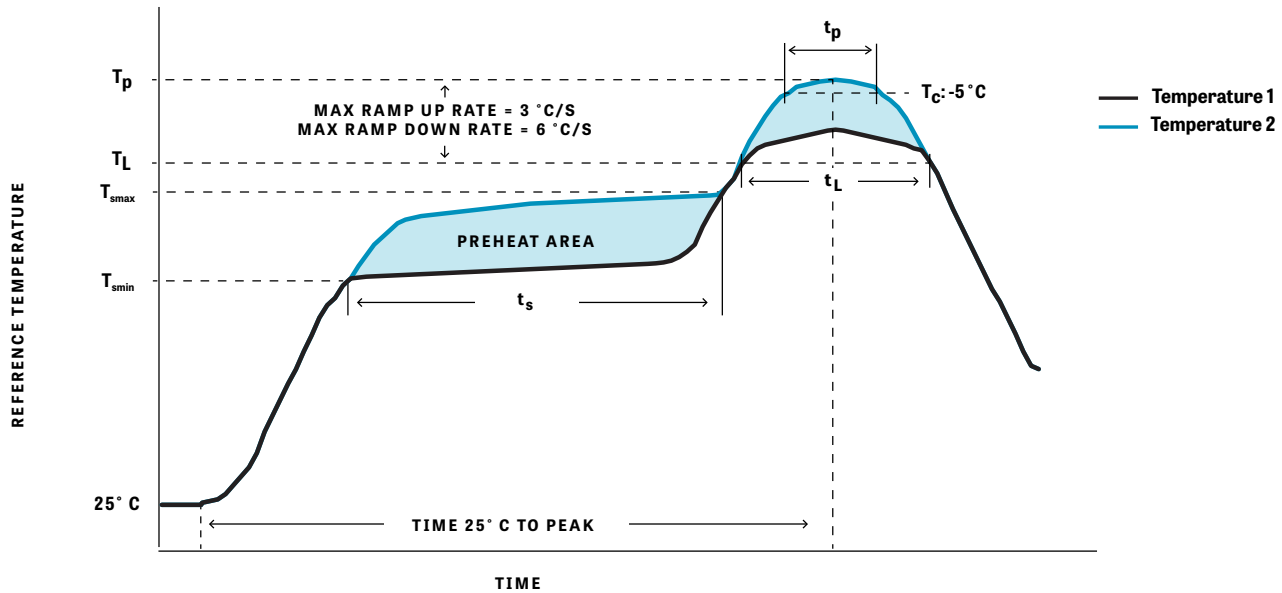

## Guidelines


Profile Feature	Pb-Free Assembly
<b>Preheat/Soak</b>	
> Temperature Min ( $T_{smin}$ )	150 °C
> Temperature Max ( $T_{smax}$ )	200 °C
> Maximum Time ( $t_s$ ) from $T_{smin}$ to $T_{smax}$	60-120 seconds
Ramp-up rate ( $T_L$ to $T_p$ )	3 °C/second max.
Liquidous Temperature ( $T_L$ )	217 °C
Time ( $t_L$ ) maintained above $T_L$	60-150 seconds
Maximum peak package body temperature ( $T_p$ )	260 °C
Time ( $t_p$ ) within 5 °C of the specified temperature ( $T_c$ )	30 seconds
Ramp-down rate ( $T_p$ to $T_L$ )	6 °C/second max.
Maximum Time 25 °C to peak temperature	8 minutes max.

**Klaran GD Series UVC LEDs**

**Reel Packaging Specification**


Klaran UVC LEDs are packed in tape and reel for machine manufacturing.

**TAPE DIMENSIONS**

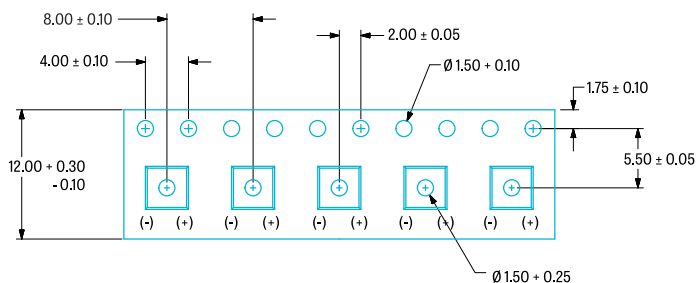


All measurements are in millimeters (mm).

**LED POSITION IN TAPE**

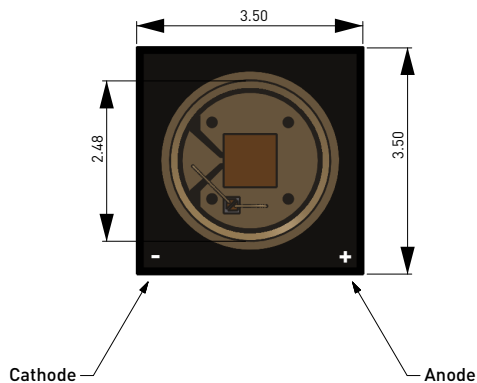

Devices are placed with the cathode to the left so the polarity direction is cathode to anode.

**REEL INFORMATION**

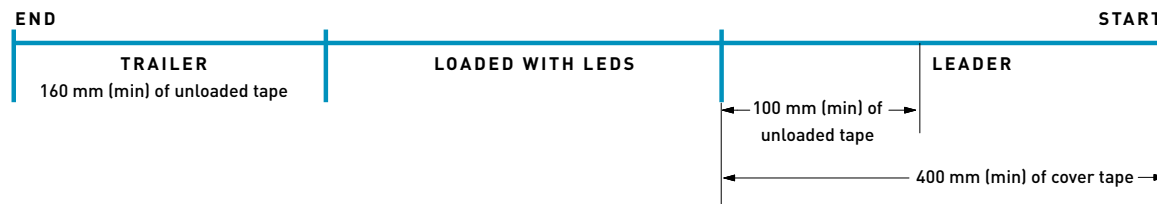

Each reel includes a leader and trailer section that is not loaded with LEDs.

## Handling Precautions

LEDs are sensitive to static electricity. When handling, proper ESD protection is required, including:

- > Eliminating static charge
- > Using grounded wriststrap, ESD footwear, clothes, and floors
- > Grounded workstation and tools.

## Eye Safety Guidelines

During operation, the LED emits high intensity ultraviolet (UV) light, which is harmful to skin and eyes. UV light is hazardous to skin and may cause cancer. Avoid exposure to UV light when LED is operational. Precautions must be taken to avoid looking directly at the UV light without the use of UV light protective glasses. Do not look directly at the front of the LED or at the LED's lens when LED is operational.

Attach the following warning labels on products/systems that use UV LEDs.

## Compliance

The levels of environmentally sensitive, persistent biologically toxic (PBT), persistent organic pollutants (POP), or otherwise restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EU on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS), as adopted by EU member states on January 2, 2013.



## DISCLAIMER

The information in this document has been compiled from reference materials and other sources believed to be reliable, and given in good faith. No warranty, either expressed or implied, is made, however, to the accuracy and completeness of the information, nor is any responsibility assumed or implied for any loss or damage resulting from inaccuracies or omissions. Each user bears full responsibility for making their own determination as to the suitability of Crystal IS products, recommendations or advice for its own particular use. Crystal IS makes no warranty or guarantee, express or implied, as to results obtained in end-use, nor of any design incorporating its Products, recommendation or advice.

Each user must identify and perform all tests and analyses necessary to ensure that its finished application incorporating Crystal IS' products will be safe and suitable for use under end-use conditions. Each user of devices assumes full responsibility to become educated in and to protect from harmful irradiation. Crystal IS specifically disclaims any and all liability for harm arising from buyer's use or misuse of UVC devices either in development or end-use.

WE INVITE YOU TO LEARN MORE ABOUT OUR UVC LEDs.

70 Cohoes Avenue, Green Island, NY 12183 U.S.A.

518.271.7375 | [www.klaran.com](http://www.klaran.com) | [sales@klarant.com](mailto:sales@klarant.com)

© 2018 Crystal IS, Inc. All rights reserved. Crystal IS, Klaran and the Crystal IS logo are trademarks of Crystal IS, Inc. and/or its affiliates. All other trademarks are the property of their respective owners. 1045-1806